

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
13 January 2005 (13.01.2005)

PCT

(10) International Publication Number
WO 2005/003511 A1

(51) International Patent Classification⁷: E21B 43/10,
29/10, 41/00

(21) International Application Number:
PCT/GB2004/002763

(22) International Filing Date: 28 June 2004 (28.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0315251.9 30 June 2003 (30.06.2003) GB

(71) Applicants (for all designated States except US): BP EX-
PLORATION OPERATING COMPANY LIMITED
[GB/GB]; Chertsey Road, Sunbury on Thames, Middlesex
TW16 7BP (GB). XL TECHNOLOGY LIMITED
[GB/GB]; Gibb House, Kennel Ride, Ascot, Berks SL5
7NT (GB).

(72) Inventors; and

(75) Inventors/Applicants (for US only): HEAD, Philip
[GB/GB]; The Glade, Springwoods, Virginia Water, Sur-
rey GU25 4PW (GB). LURIE, Paul, George [GB/GB];
The Jays, Longhurst Road, East Horsley, Surrey KT24
6AF (GB).


(74) Agents: COLLINS, Frances, Mary et al.; BP Interna-
tional Limited, Patents & Agreements, Chertsey Road,
Sunbury on Thames, Middlesex TW16 7LN (GB).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,

[Continued on next page]

(54) Title: APPARATUS AND METHOD FOR SEALING A WELLBORE

(57) Abstract: A method for sealing a hole in a tubular in a wellbore comprising : (A) locating the tubular patch adjacent the hole; (B) (i) plastically expanding a first portion of the tubular patch above the hole into annular sealing engagement with the tubular to form a first annular seal and (ii) plastically expanding a second portion of the tubular patch below the hole in the tubular into annular sealing engagement with the tubular or the open hole to form a second annular seal thereby sealing the hole in the tubular. The patch may be a corrugated tube prior to expansion in order to pass through restrictions and may have a section with an increased wall thickness including a resilient seal.

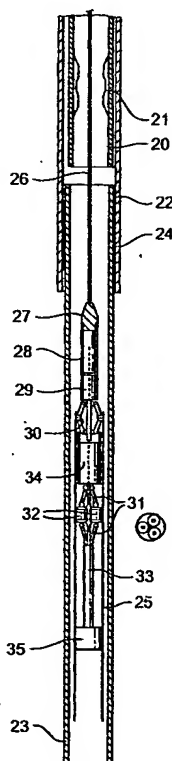

WO 2005/003511 A1

BEST AVAILABLE COPY

TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

- (84) **Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations* AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM,

PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

- *of inventorship (Rule 4.17(iv)) for US only*

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

APPARATUS AND METHOD FOR SEALING A WELLBORE

The present invention relates to an apparatus and method for forming an annular seal between a patch and a tubular in a wellbore or between a patch and an open hole wellbore.

In the course of completing an oil and/or gas well, it is common practice to run a string of protective casing into the well bore and then to run production tubing inside the casing. The annulus between the casing and the surrounding formation is then sealed with a deposit of cement to prevent fluid from flowing through the annulus from one formation zone to another. If the casing traverses a hydrocarbon-bearing zone of the formation, the casing is perforated to create flow apertures through the casing and cement so that the formation fluids can flow into the well. Such perforations may subsequently be sealed using an expandable sealing member, preferably in the form of a radially expandable tubular metal patch lowered into the wellbore through the production tubing on a conventional patch setting tool. A patch may also be used to seal holes in the casing caused by corrosion or to reinforce corroded casing sections which have not yet become perforated. Still other applications, such as bridging the gap between sections of parted casing will also be apparent to those skilled in the art. In some completions, however, the wellbore is uncased, and an open face is established across the hydrocarbon bearing zone. A patch may also be used in such open face wellbores in order to increase the mechanical strength of the wellbore wall or to seal off an open face zone, for example, a water-producing zone. Where the patch is used to increase the mechanical strength of the wellbore wall, the patch is subsequently perforated where it traverses a hydrocarbon bearing zone of the formation. In other

completions, a sandscreen is used in open face wellbores. Suitably, the sandscreen that is run into the open face wellbore comprises one or more tubular ("patch") sections that lie across one or more non-hydrocarbon-bearing intervals of the wellbore, for example, a water-producing interval, and one or more screen sections that lie across one or more hydrocarbon-bearing intervals of the wellbore. Generally, an external casing packer is set in the annulus formed between the tubular section(s) of the sandscreen and the open face wellbore at each end of the tubular section(s). A cement slurry may also be introduced into the annulus formed between the tubular section(s) and the open face wellbore to ensure that the non-hydrocarbon-bearing interval(s), for example, water producing interval(s) is effectively sealed off. It would therefore be advantageous to eliminate the requirement for the external casing packers and for cementing the tubular section(s) of a sandscreen.

According to US 2003/0015246, perhaps the most common prior art approach to sealing perforations in a casing has been to use a patch comprising a cylindrical steel sleeve with a rubber-like gasket material bonded to the outer surface of the steel sleeve. Generally, for deployment, the patch is wrapped about an expansion device which is typically a mechanically operated expander plug and is subsequently lowered through the production tubing to the uncovered perforation. Upon reaching the perforation the patch is expanded to seal the perforation. Typically the patch is held in place in the well casing by friction. However, in many wells there are one or more restrictions in the production tubing with the minimum restriction imposing a limit on the diameter of the unexpanded patch. During expansion of the patch, the radial thickness of the wall of the cylindrical steel sleeve decreases. In order to mitigate the risk of the expanded patch collapsing under the external pressure exerted by the formation fluids, the maximum expansion ratio for a tubular metal patch is about 30%. A problem therefore arises when the minimum restriction in the production tubing is small compared with the diameter of the wellbore as it may not be possible to expand the patch to form a fluid-tight seal with the casing or the wall of an open hole wellbore without exceeding the maximum expansion ratio.

A solution to this problem has been to use a vertically corrugated metal liner (for example, as described in US 3,203,451) wherein the external cross-sectional perimeter of the corrugated liner is greater than the internal cross-sectional circumference of the

casing but the maximum external cross-sectional dimension of the corrugated liner is less than the internal diameter of the casing so the liner can be inserted into the casing. After the liner is placed at the desired location in the casing, an expander tool is run through the corrugated liner to cause it to assume a cylindrical shape inside the casing. The liner is thus left in substantially maximum compressive hoop stress. An expansion tool comprising an expanding cone, a collet head and collet spring arms is described. The arms have outwardly enlarged portions which perform the final forming action to force the corrugated liner into a substantially cylindrical shape as the cone and collet head are pulled through the corrugated tube. It is said that the expression "expanding" the liner into contact with the casing may be misleading. The expanding cone does expand the liner in the sense that it forces the outer ridges of the corrugations outwardly until they come in contact with the casing. Then the inner corrugations are, in a sense, expanded radially outwardly until they come in contact with the casing. It would therefore be evident to the person skilled in the art that the reformed liner is merely elastically reformed and is not subsequently plastically expanded to form a seal with the wellbore wall.

An apparatus and a method for expanding a liner patch, in particular, a corrugated liner patch, in a tubular to seal a hole therein is described in WO 98/214444. The apparatus comprises a body having a top portion, a bottom portion and a middle portion, the middle portion having an outer diameter greater than the top portion and an outer diameter greater than the bottom portion; a first set of fingers disposed around the top portion of said body and a second set of fingers disposed around the bottom portion of said body; the arrangement being such that, in use, said fingers can be urged radially outwardly by displacement thereof over said middle portion (collet expander). Preferably, a cone is located above said body to facilitate deformation of the liner patch. The liner patch is expanded over the cone and finally over the fingers as the apparatus is pulled all of the way through the liner patch. Again, the term expansion refers to elastically reforming the patch as opposed to plastically expanding the reformed patch.

It is an object of the present invention to provide a method and apparatus for forming an annular fluid-tight seal between at least a portion of a plastically expandable tubular patch and the wall of a wellbore (an open face wellbore or a cased/lined wellbore).

It is also an object of the present invention to provide a patch comprising a metal tube that is capable of being deformed such that in its deformed state the patch can pass through a restriction in a wellbore to the location where the patch is to be deployed. Once at the desired location in the wellbore, the patch may be elastically reformed into a substantially regular tubular shape having an outer diameter greater than the minimum restriction in the wellbore and subsequently at least a portion of the reformed tubular patch may be plastically expanded to form a fluid tight seal with the wall of the wellbore (open face wellbore, or a cased/lined wellbore) wherein the expansion ratio for the reformed patch is in the range 10 to 30%.

Thus, according to a first embodiment of the present invention there is provided an apparatus for plastically expanding a tubular patch in a wellbore comprising:

- (a) an optional gripping assembly comprising at least one radially extendible gripping member for gripping the interior wall of the tubular patch and a mechanical means for radially extending the gripping member(s);
- (b) a rotatable expander tool, disposable in the tubular patch, comprising a plurality of expander elements radially extendible therefrom adapted to engage with the interior wall of the tubular patch and a mechanical means for radially extending the expander elements; and
- (c) at least one electric motor for, optionally, supplying motive power to the mechanical means for radially extending the gripping member(s) of the optional gripping assembly, for supplying motive power to the mechanical means for radially extending the expander elements of the expander tool, and for providing rotation to the expander tool.

According to a second embodiment of the present invention there is provided a method for sealing a hole in a tubular in a wellbore or for sealing an open hole interval (also referred to as an "open face interval") of a wellbore comprising:

- (A) introducing a tubular patch system into the wellbore and locating the system adjacent a hole in the tubular or adjacent the open hole interval of the wellbore that it is desired to seal, the tubular patch system comprising a tubular patch and an apparatus for plastically expanding the tubular patch comprising (a) a gripping assembly comprising at least one radially extendible gripping member for gripping the interior wall of the tubular patch as the patch is being introduced and located at the desired location in the wellbore and a mechanical means for radially extending the gripping member(s); (b) a

rotatable expander tool, disposed in the tubular patch, comprising a plurality of expander elements radially extendible therefrom adapted to engage with the interior wall of the tubular patch and a mechanical means for radially extending the expander elements; and (c) at least one electric motor for supplying motive power to the mechanical means for radially extending the gripping member(s) of the gripping assembly and to the mechanical means for radially extending the expander elements of the expander tool, and for providing rotation to the expander tool; and

(B) actuating the expander tool to plastically expand the tubular patch to seal off the hole in the tubular or to seal off the open hole portion of the wellbore.

The apparatus for plastically expanding the tubular patch may be run into the wellbore suspended from conventional wireline (a reinforced steel cable encasing one or more electrical wires or segmented electrical conductors) which provides support for the weight of the apparatus and electrical power for actuating the components of the expansion tool. Alternatively, the apparatus may be run into the wellbore suspended from electric coiled tubing. Suitable electric coiled tubing is described in UK patent application no. GB 2359571-A which is herein incorporated by reference.

Suitably, the apparatus may comprise a single electric motor for providing motive power to the mechanical means for radially extending the gripping member(s) of the gripping assembly, for providing motive power to the mechanical means for radially extending the plurality of expander elements of the expander tool and for rotating the expander tool, typically via a drive means. Alternatively, the mechanical means for radially extending the gripping member(s), the mechanical means for radially extending the plurality of expander elements and the drive means for rotating the expander tool may be provided with dedicated electric motors. For avoidance of doubt, the mechanical means for radially extending the gripping member(s) of the gripping assembly and the mechanical means for radially extending the expander elements of the expander tool are also capable of radially retracting the gripping member(s) and expander elements respectively.

Preferably, the mechanical means for radially extending and retracting the expander elements of the expander tool is a jack mechanism or a cone displacement mechanism comprising a conical member that is moveable in a longitudinal direction with respect to the expander elements such that the expander elements are displaced

radially outwardly or inwardly over the tapering surface of the conical member. Any other suitable electrically actuated mechanical means known to the person skilled in the art for radially extending and retracting the expander elements may also be employed. Suitably, the drive means for rotating the expander tool is a rotatable shaft. Thus, the electric motor provides rotational movement to an output shaft that is connected to the expander tool to provide rotation thereto.

It is also envisaged that the expander tool may be hydraulically actuated via at least one hydraulic pump. Thus, electric power supplied to the motor may be used to operate the pump to provide pressurised fluid to the expander tool to radially extend the expander elements. For example, the pressurised fluid may be used to actuate the cone displacement mechanism. Alternatively, the pressurised fluid may be used to directly urge the expander elements radially outwards into engagement with the interior wall of the patch. In addition, a shaft extending from the hydraulic pump may provide rotational motion to the expansion tool. Typically, the apparatus of the present invention may comprise a reservoir for a hydraulic fluid disposed in a housing. Suitably, the expansion tool is arranged below the housing. Alternatively, the pressurised fluid may be filtered wellbore fluid.

During the running in operation, the interior wall of the tubular patch, preferably, a tubular metal patch, is gripped by the least one radially extendible gripping member of the gripping assembly, for example, by at least one radially extendible "slip". Preferably, the at least one radially extendible gripping member grips the interior wall of the tubular metal patch at the upper end thereof. Suitably, the gripping member(s) comprises teeth or other gripping elements. Preferably, the apparatus is provided with a plurality of "slips", preferably 2 to 4 slips. Suitable "slips" for use with the patch would be well known to the person skilled in the art. Preferably, the mechanical means for radially extending and retracting the gripping member(s) of the gripping assembly may be a jack mechanism or a cone displacement mechanism, as described above for the expander tool. Preferably, the gripping assembly remains fixed in place in the tubular patch while the expander tool is rotated i.e. the gripping assembly does not rotate with the expander tool. It is also envisaged that the radially extendible gripping member(s) of the gripping assembly may be hydraulically actuated, as described above for the expander tool. Thus, the electric motor may drive a hydraulic

pump thereby providing pressurised fluid to the gripping assembly to radially extend the gripping member(s).

Suitably, as an alternative to holding the patch at the desired location using at least one radially extendible gripping member, an upper section of the patch may be fixed in position in the wellbore by means of a plurality of mechanical dimples, for example circular shaped dimples arranged circumferentially around the tubing at the desired location, as described in Figure 16 of US 6,223,823 which is herein incorporated by reference. Suitably, at least 3 dimples are provided. The mechanical dimples may be activated by means of internal pressure applied by the expander elements of the expander tool. Preferably, a resilient annular sealing member is provided on the external surface of the patch in the vicinity of the dimples to impart an anchoring surface against which the dimples engage thus improving the contact between the patch and the wall of the tubular (for example, the casing or liner of a wellbore) or with the open hole wellbore (open face wellbore). Thus, the gripping assembly may be omitted from the apparatus of the present invention.

Once the tubular patch system has been lowered to a level proximate a perforation or a damaged section of a tubular (for example, casing or liner) or the system lies within an open hole interval of the wellbore, at least a portion of the tubular patch is plastically expanded by rotating the expander tool and actuating the mechanical means for radially extending the expander elements such the expander elements engage with the interior wall of the patch and a portion of the patch is plastically expanded against the wall of the tubular (for example, casing or liner) or the wall of the open hole wellbore thereby forming an annular fluid-tight seal. Suitably, the expander elements of the expander tool are rollers or balls that may be radially extended or retracted via the electrically actuated mechanical means (for example, a jack mechanism or cone displacement mechanism). Preferably, the rollers have a longitudinal length of from 0.5 to 5 inches, for example 0.5 to 3 inches with the longitudinal length of the annular seal corresponding to the longitudinal length of the rollers. Where the radially extendible elements of the expander tool are balls, the annular seal has a longitudinal length of approximately half the ball diameter. The diameter of the balls and hence the longitudinal length of the annular seal is dependent upon the internal diameter of the wellbore and the external diameter of the tubular patch. For example, where a 3 inch

external diameter tubular patch is deployed in a wellbore having a 4.5 inch internal diameter casing, the balls preferably have a diameter of at least 1.5 inch, preferably, 1.5 to 3 inches, for example about 2 inches. Accordingly, the annular seal preferably has a longitudinal length of 0.75 to 1.5 inches.

Preferably, the expander tool is also provided with an electrically actuated mechanical means for moving the radially extendible expander elements of the expander tool longitudinally within the tubular patch thereby extending the annular seal. Preferably, the mechanical means is a screw mechanism. Suitably, the screw mechanism is actuated by means of a dedicated electric motor. Accordingly, the apparatus of the present invention may be used to form a seal along the entire length of the patch by gradually moving the expander tool through the patch. Alternatively, the apparatus of the present invention may be used to form a plurality of annular (ring) seals. Preferably the annular (ring) seals have a curved profile to mitigate the risk of the seal being put under stress which can lead to increased corrosion of the patch and/or the tubular.

Preferably, the annular (or ring) seal is formed by partially expanding a portion of the tubular metal patch and then longitudinally extending the expanded portion before further expanding the portion of the tubular metal patch and then further longitudinally extending the expanded portion of the tubular metal patch and repeating these steps until the portion of the patch is plastically expanded against the wall of the tubular or against the open hole and a fluid tight annular (or ring) seal is formed between the patch and the wall of the tubular or the open hole respectively. The patch is now locked in place in the tubular or in the open hole and the radially extendible expander elements may be retracted and the gripping member(s) of the gripping assembly (for example, slips) unset before moving the apparatus to a new position in the patch. The gripping member(s) of the gripping assembly (for example, slips) is then reset and a further annular (or ring) seal may be formed as described above. Preferably, the apparatus is provided with sensors for monitoring the expansion of the patch and the position of the expansion tool and gripping assembly in the wellbore thereby ensuring that the ring seals are formed at the desired location in the wellbore.

Suitably, the apparatus of the present invention may be used to deploy a patch comprising an inner metal tube and an outer resilient sealing member. Suitably, the

inner metal tube is formed from steel, preferably, carbon steel. As discussed above, the thickness of the inner metal tube will be a function of the diameter of the wellbore and the yield and tensile strength of the metal forming the tube. Preferably, the thickness of the inner metal tube is in the range 0.25 to 0.5 inches. Preferably, the outer resilient sealing member is formed from an elastomeric material that is resistant to the well environment, i.e. temperature, pressure, well fluids, and the like. Suitably, the elastomeric material is selected from rubber (for example, silicone rubber), polymers of ethylene-propylene diene monomer (EPDM), polytetrafluoroethylene, polyphenylene sulfide, and perfluoroelastomers. The outer resilient sealing member may be a sheath extending along substantially the entire length of the patch or may comprise at least one outer resilient sealing ring arranged at a location where it is desired to form an annular fluid-tight seal with the casing, liner or the wall of the open hole wellbore and having a length corresponding to the longitudinal length of the annular seal. Typically the patch may be provided with a plurality of outer resilient sealing rings thereby allowing a plurality of annular fluid-tight seals to be formed. Typically, the outer resilient sealing rings have a longitudinal length of 1 to 5 inches. Suitably, the outer resilient sealing rings are arranged at the upper and lower ends of the patch although the sealing rings may also be arranged at intervals along the patch, for example, every 0.5 to 2 feet. Typically, the thickness of the outer resilient sealing member (sheath or ring) is in the range 0.05 to 0.15 inches, for example, about 0.1 inches. Suitably, the outer resilient sealing member may be adhered to the inner metal tube. Alternatively, the inner metal tube may be a tight fit within the outer resilient annular sealing member.

Where a tubular patch is to be used to seal a hole in a tubular (or to seal off an open hole interval of the wellbore), at least one ring seal is formed above the hole (or above the open hole interval that it is desired to seal) and at least one ring seal is formed below the hole (or below the open hole interval).

Thus, according to a third embodiment of the present invention there is provided a method for sealing a hole in a tubular in a wellbore or for sealing an open hole interval of a wellbore comprising:

- (A) introducing a tubular patch into the wellbore and locating the tubular patch adjacent the hole in the tubular or adjacent the open hole interval of the wellbore;
- (B) (i) plastically expanding a first portion of the tubular patch above the hole in the

tubular or above the open hole interval of the wellbore into annular sealing engagement with the tubular or the open hole to form a first annular seal and (ii) plastically expanding a second portion of the tubular patch below the hole in the tubular or below the open hole interval of the wellbore into annular sealing engagement with the tubular or the open hole to form a second annular seal thereby sealing the hole in the tubular or the open hole interval of the wellbore.

Preferably, the tubular patch is located in the desired position in the wellbore and the annular seals are formed using the apparatus of the first embodiment of the present invention.

In order to strengthen the seal, a plurality of annular seals may be formed above and below the hole in the tubular or above and below the open hole interval of the wellbore. An advantage of sealing off the hole in a tubular or of sealing off an open hole interval of the wellbore by forming annular seals between the patch and the tubular or the open hole interval is that there is no requirement to plastically expand the entire patch. Suitably, the open hole interval of the wellbore may be an interval that requires hydraulic isolation, for example, a water-producing interval of the wellbore. An advantage of hydraulically isolating an open hole interval of a wellbore using the method of the third embodiment of the present invention is that this allows external casing packers and the use of cement to be eliminated.

The method of the third embodiment of the present invention may also be used in conjunction with a sandscreen comprising at least one tubular ("patch") section and at least one screen section where the sandscreen is run into a wellbore until the screen section(s) lie across a hydrocarbon-bearing interval of an open hole wellbore and the tubular section(s) lies across an interval of the open hole wellbore that it is desired to hydraulically isolate. It is envisaged that the sandscreen may be run into the wellbore supported by the gripping assembly of the apparatus of the first embodiment of the present invention. If necessary, the apparatus may be provided with a traction device to assist in placing the sandscreen at the desired location in the open hole wellbore, particularly, where the wellbore is a deviated wellbore (for example, a side track or lateral well). It is also envisaged that the sandscreen may be deployed in the wellbore using a conventional "running-in" tool before passing the apparatus of the first embodiment of the present invention through the sandscreen (supported on wireline or

electric coiled tubing) to the location where it is desired to form the annular fluid-tight seals, in which case the gripping assembly may be omitted from the apparatus. Preferably, at least one annular fluid-tight seal is formed at each end of the tubular ("patch") section(s) of the sandscreen. Preferably, a plurality of rings seals may be formed at intervals along the entire length of the tubular ("patch") section(s) of the sandscreen.

Suitably, the apparatus of the first embodiment of the present invention and the methods of the second and third embodiments of the present invention may be used to deploy a tubular metal patch in a wellbore at a location below a restriction, D_1 , wherein the patch is capable of being deformed into an irregularly shaped tube having a maximum external cross-sectional dimension, D_2 , and of being subsequently elastically reformed into a substantially regularly shaped tube having an external diameter, D_3 , wherein D_2 is less than D_1 and D_3 is greater than D_1 , and wherein at least a section of the reformed tube is capable of being plastically expanded to an external diameter, D_4 , to form a fluid tight annular seal with the wall of a tubular (for example, casing or liner of a wellbore) or the wall of an open hole interval of a wellbore and wherein the expansion ratio, $[(D_4 - D_3)/D_3] \times 100$, is in the range 10 to 30%, preferably 20 to 30%, for example 25 to 30%.

By plastically expanded is meant that the expanded shape is maintained when an expansion pressure is no longer being applied.

Suitably, the deformed tube may be reformed into a tube of substantially uniform external diameter (i.e. a tube having a substantially circular transverse cross-section), preferably, into its original tubular shape, prior to plastically expanding at least a section of the reformed tube to form an annular fluid-tight seal with the tubular or open hole. Alternatively, a section of the deformed tube may be reformed and plastically expanded to form an annular seal prior to reforming and optionally plastically expanding the remainder of the deformed tube.

Suitably, production tubing is run into the wellbore and the patch is deployed in the wellbore through the production tubing. Typically, the production tubing has one or more restrictions therein such that the deformed patch must be capable of passing through the minimum restriction in the production tubing.

Preferably, the metal tube is deformed into a longitudinally corrugated tube of

the types well known to the person skilled in the art. It is also envisaged that the metal tube may be deformed into any other shape that is capable of passing through the restriction, D_1 , for example, the patch may be deformed to put a groove therein, as described in US 3,489,220, which is herein incorporated by reference. Suitably, the metal tube may be deformed to a size smaller than the restriction, D_1 , using a set of rollers located above the wellhead.

Typically, the deformed metal tube has a maximum external diameter, D_2 , that is slightly less than the restriction, D_1 , for example 5 to 10% less than the restriction, D_1 . At least a portion of the reformed tubular patch is capable of being plastically expanded to form an annular fluid tight seal with the wall of the wellbore wherein the total expansion ratio for the deformed tube, $[(D_4 - D_2)/D_2] \times 100$ is 40 to 50% with the proviso that the expansion ratio for the reformed tube, $[(D_4 - D_3)/D_3] \times 100$, is in the range 10 to 30%, preferably 20 to 30%, for example 25 to 30%.

Suitably, the patch may be deployed in a cased wellbore, a lined wellbore or an open hole wellbore with the patch forming an annular fluid tight seal with the wall of the casing, liner or the open hole respectively. It is envisaged that a plurality of portions of the reformed patch may be plastically expanded to form a plurality of annular seals. Alternatively, the deformed tubular patch may be reformed and plastically expanded along substantially the entire length thereof.

Suitably, the patch may be from 10 to 1000 feet in length, preferably, 30 to 600 feet, more preferably 50 to 300 feet, for example, 100 to 200 feet. The patch may be formed from tubular metal sections having a length of 5 to 40 feet, preferably 20 to 30 feet. The sections of the patch may be joined together using conventional flush joints having a maximum diameter smaller than the minimum restriction in the wellbore, in which case there is no requirement to deform the joints. Alternatively, the sections of the patch may be joined together using deformable joints. Suitably, the deformable joint comprises a male connection on a first tubular metal section of the patch and a female connection on a second tubular metal section of the patch where the male and female connections are provided with interlockable complementary formations such that when the joint is deformed and subsequently reformed, the complementary formations of the male and female connections do not break apart. For example, the male and female connections may be provided with interlockable dovetailed threads. Preferably,

the deformable joint is also capable of being plastically expanded to allow the patch to be plastically expanded along its entire length. Suitable expandable joints are well known to the person skilled in the art and may be adapted to be interlockable, for example, by employing interlockable dovetailed threads.

Suitably, the elastically deformable and plastically expandable metal patch is formed from steel, for example, a low carbon steel or other suitable metal alloy. Typically, the elastically deformable and plastically expandable metal patch may be provided with an outer resilient sealing member (sheath or ring), as described above. Preferably, the elastically deformable and plastically expandable metal patch is coated with a resilient material, typically an elastomeric material, to provide an improved annular seal with the tubular (for example, casing or liner) or with the wall of the open hole interval of the wellbore upon plastic expansion of the reformed tube. Preferably, the elastomeric material is resistant to the well environment, i.e. temperature, pressure, well fluids, and the like. Suitable elastomeric materials are as described above.

As discussed above, the thickness of the wall of the metal tube decreases as it is plastically expanded. The required thickness of the wall after expansion is a function of the diameter of the wellbore and the yield and tensile strength of the metal forming the tube. In general, as the wellbore diameter increases it is necessary to increase the thickness of the wall of the plastically expanded metal tube in order for the tube to apply sufficient force to seal the hole in the tubular (for example, perforations in the casing or liner of the wellbore) or to seal the open hole wellbore. Preferably, the thickness of the wall of the plastically expanded metal tube is in the range 0.25 to 0.5 inches for a plastically expanded tube having an internal diameter of 6 to 8 inches. Typically, the thickness of the coating of resilient material is in the range 0.05 to 0.2 inches, for example, about 0.1 inch.

In yet a further embodiment of the present invention there is provided a patch that may be deployed in a wellbore using the apparatus and method of the present invention. Suitably, the patch may be deployed at a location below a restriction, D_1 , the patch comprising a metal tube having an outer diameter small enough to pass through the restriction wherein at least one section of the metal tube is of increased wall thickness, t_1 , compared with the wall thickness, t_2 , of adjacent sections of the metal tube (i.e. $t_1 > t_2$) and wherein the at least one section of metal tube of increased wall thickness

is capable of being plastically expanded to form an annular (or ring) seal. Preferably, the patch is capable of being deployed through production tubing. Preferably, the difference in wall thickness, t_1 - t_2 , corresponds to the radial distance through which the section of metal tube of increased thickness is plastically expanded to form an annular fluid-tight seal. Preferably, the section of metal tube of increased wall thickness, t_1 , has a reduced inner diameter compared with adjacent sections of the tube of wall thickness, t_2 . Preferably, after plastic expansion of the section of tube of increased thickness the inner diameter of the plastically expanded section of tube is substantially the same as the inner diameter of the adjacent non-plastically expanded sections of the metal tube. Preferably, prior to expansion the patch has a substantially uniform outer diameter.

The section(s) of metal tube of increased wall thickness may be plastically expanded against the metal casing or metal liner of a wellbore to form a metal to metal annular seal. It is also envisaged that the section(s) of tube of increased wall thickness may be coated with a resilient material, preferably, an elastomeric material, in order to provide an improved seal in an open hole wellbore. Suitable elastomeric materials are as described above.

Preferably, the section(s) of metal tube of increased wall thickness, t_1 , may be provided with an annular recess or groove on the outer surface thereof having an annular resilient sealing member, for example, an O-ring located therein. Preferably, the annular resilient sealing member is formed of an elastomeric material. Suitable elastomeric materials are as described above. Expansion of the section(s) of the metal tube of increased wall thickness, t_1 , will force the annular resilient sealing member against the metal casing or metal liner of a wellbore or against the wall of an open hole wellbore thereby forming a fluid-tight seal.

The patch of this further embodiment of the present invention is preferably plastically expanded using the apparatus of the first embodiment of the present invention. However, it is also envisaged that the patch may be deployed using any conventional expansion tool, in particular, an expansion tool having hydraulically actuated, radially expandable members, as described in US 2001/0045284, which is herein incorporated by reference.

When the apparatus of the first embodiment of the present invention is used to reform a deformed tubular patch, for example, a longitudinally corrugated tube, at least

a portion of the tube is first reformed into its original tubular shape using the expander elements of the expander tool before plastically expanding the portion of reformed tube to form an annular (or ring) seal between the patch and the casing or liner or open hole wellbore. Preferably, the deformed tubular patch is reformed along the entire length thereof. Suitably, a plurality of portions of the reformed tubular patch may be plastically expanded using the apparatus of the present invention to form a plurality of annular (or ring) seals or, alternatively, the entire tubular patch may be plastically expanded to form a seal with the wall of the casing, liner or the open hole wellbore.

In a further aspect of the present invention, the apparatus of the first embodiment of the present invention may be used to form an annular (or ring) seal between a liner string and a cased or lined interval of a wellbore such that the annular (or ring) seal acts as a liner hanger in addition to sealing the annulus between the liner and the wall of the cased or lined interval of wellbore. Thus, the ring seal must be capable of taking the weight of the liner string. Preferably, the "liner hanger" comprises a plurality of ring seals, for example, 2 to 5 annular seals. Typically, the liner string is lowered into the wellbore, supported by the radially extendible gripping member(s) of the gripping assembly, until the upper section of the liner string overlaps the lower section of the cased or lined interval of the wellbore with the expander tool located in the upper section of the liner string. The expander elements of the expander tool are then extended radially outwardly into engagement with the interior wall of the liner string and a portion of the liner string is plastically expanded against the casing or lining to form an annular fluid tight ring seal between the upper section of the liner string and the lower section of the cased or lined interval of wellbore. Where the liner string is deployed in a deviated wellbore (lateral or side track wellbore), the apparatus of the first embodiment of the present invention may be provided with a tractor for running the liner string into the deviated wellbore. It is also envisaged that a prior art means for running the liner string into a wellbore may be employed. Once the liner string is in place in the wellbore, the apparatus of the first embodiment of the present invention may run into the wellbore to form the "liner hanger". As would be evident to the person skilled in the art, the gripping assembly may be omitted from the apparatus when the liner string is run into the wellbore using a prior art "running-in" means.

The present invention will now be illustrated by reference to Figures 1 to 10.

Figure 1 is a transverse cross-sectional view illustrating a deformable tubular patch in an undeformed state 1, and deformed into a longitudinally corrugated tube 2 having a maximum outer diameter, D_2 less than the minimum restriction 3 in a wellbore. Figure 2 shows the patch reformed into its original tubular shape 4 and in a plastically expanded state 5. Figure 3, illustrates a deformable and plastically expandable dovetail joint 6 for joining sections of the deformable tubular metal patch.

Figure 4 is a longitudinal cross sectional view showing a tubular metal patch 10 in position in a cased wellbore 11 prior to expansion of the patch against the casing wall 12. The patch 10 is provided with a section 13 of decreased internal diameter and hence increased wall thickness. Figure 5 shows the patch after a metal to metal ring seal 14 has been formed at the location of the section of decreased internal diameter.

Figure 6 illustrates a modified patch of the type shown in Figures 4 and 5 wherein the section 13 of patch of decreased internal diameter and hence increased wall thickness is provided with an external groove 17 adapted to receive an O-ring, 15, formed from an elastomeric material. Figure 7 shows the patch in annular (or ring) sealing engagement with the walls of a wellbore 16 which may be either a cased or lined wellbore or an open hole wellbore.

Referring to Figure 8, a production tubing 20 having a restriction 21 is positioned within the casing 22 of a wellbore. A liner 23 is hung from the casing 22 via a casing hanger 24. An apparatus for deploying a tubular metal patch 25 is lowered into the wellbore through the production tubing 20 suspended from a wireline 26. The apparatus comprises a connector 27, a controller 28, a first electric motor 29 for actuating a screw mechanism (not shown) for radially extending and retracting slips 30, and an expander tool comprising a jack mechanism 31 for radially extending and retracting rollers 32, and a rotatable shaft 33 that extends from a second electric motor 34 through patch 25 to a third electric motor 35. The second electric motor 34 actuates the jack mechanism 31 and a means (not shown) for driving the rotatable shaft 33 while the third electric motor 35 actuates a screw mechanism (not shown) for moving the rollers 32 in a longitudinal direction within the patch 25. The slips 30 are shown in their radially extended position gripping the tubular metal patch 25. Once the patch 25 is in the desired location in the wellbore, the shaft 33 is rotated and the rollers 32 are gradually radially extended to plastically expand the patch until the patch forms an

annular fluid tight seal with the wall of the liner 23. At various stages during the radial extension of the rollers 32, the third electric motor 35 actuates the screw mechanism to move the rollers upwardly and downwardly within the patch 25 thereby extending the annular seal. Figure 9 shows the result of this operation with a section of the patch 25 plastically expanded to form an annular seal 36 with the wall of liner 23. Referring to Figure 10, the rollers 32 and slips 30 are retracted before moving the expansion tool to a new position in the patch and radially extending the slips 30 to grip the interior wall of the patch. The expansion tool is then actuated to plastically expand the new section of patch, as discussed above. The third electric motor 35 may be provided with a "steady" having a centraliser 37 that engages with the liner 23. This operation may be repeated until the entire lower section of the patch has been plastically expanded against the wellbore wall. As shown in Figure 11, the apparatus may then be moved upwardly through the wellbore until the expander tool is located in the upper 38 unexpanded part of the patch 25. The slips 30 are then radially extended to engage with the wall of the casing 22 and the expander tool actuated as described above to plastically expand the upper section 38 of the tubular metal patch. The rollers 32 and slips 30 may then be retracted and the apparatus removed from the wellbore by pulling the wireline leaving behind the plastically expanded patch in annular sealing engagement with the wall of the liner 23. Although the installation of the patch is described in relation to a vertical wellbore, the apparatus of the present invention may also be deployed in a deviated well, for example, a side track or lateral well. If necessary, the apparatus may be provided with a tractor to assist in moving the tubular patch through the deviated well.

Claims:

1. An apparatus for plastically expanding a tubular patch in a wellbore comprising:
(a) an optional gripping assembly comprising at least one radially extendible gripping member for gripping the interior wall of the tubular patch and a mechanical means for radially extending the gripping member(s);
(b) a rotatable expander tool, disposable in the tubular patch, comprising a plurality of expander elements radially extendible therefrom adapted to engage with the interior wall of the tubular patch and a mechanical means for radially extending the expander elements; and
(c) at least one electric motor for, optionally, supplying motive power to the mechanical means for radially extending the gripping member(s) of the optional gripping assembly, for supplying motive power to the mechanical means for radially extending the expander elements of the expander tool, and for providing rotation to the expander tool.
2. An apparatus as claimed in Claim 1 that is suspended from wireline or electric coiled tubing.
3. An apparatus as claimed in Claims 1 or 2 wherein the mechanical means for radially extending the gripping member(s) of the gripping assembly and/or for radially extending the expander elements of the expander tool is a jack mechanism or a conical displacement mechanism.
4. An apparatus as claimed in any one of the preceding claims wherein the expander elements of the expander tool are rollers or balls.
5. An apparatus as claimed in any one of the preceding claims wherein the expander tool is provided with a further mechanical means for moving the expander

elements of the expander tool longitudinally within the tubular patch and the at least one electric motor (c) also provides motive power to the further mechanical means.

6. An apparatus as claimed in any one of the preceding claims wherein the expander tool is provided with a drive means for rotating the expander tool and the at least one electric motor (c) also provides rotation to the drive means.

7. An apparatus as claimed in Claim 6 wherein the mechanical means for radially extending the gripping member(s) of the gripping assembly, the mechanical means for radially extending the expander elements of the expander tool, the mechanical means for moving the expander elements of the expander tool longitudinally within the tubular patch and the drive means for rotating the expander tool are provided with dedicated electric motors.

8. A method for sealing a hole in a tubular in a wellbore or for sealing an open hole interval of a wellbore comprising:

(A) introducing a tubular patch system into the wellbore and locating the system adjacent a hole in the tubular or adjacent the open hole interval of the wellbore that it is desired to seal, the tubular patch system comprising a tubular patch and an apparatus for plastically expanding the tubular patch comprising (a) a gripping assembly comprising at least one radially extendible gripping member for gripping the interior wall of the tubular patch as the patch is being introduced and located at the desired location in the wellbore and a mechanical means for radially extending the gripping member(s); (b) a rotatable expander tool, disposed in the tubular patch, comprising a plurality of expander elements radially extendible therefrom adapted to engage with the interior wall of the tubular patch and a mechanical means for radially extending the expander elements; and (c) at least one electric motor for supplying motive power to the mechanical means for radially extending the gripping member(s) of the gripping assembly, for supplying motive power to the mechanical means for radially extending the expander elements of the expander tool, and for providing rotation to the expander tool; and

(B) actuating the expander tool to plastically expand the tubular patch to seal off the hole in the tubular or to seal off the open hole portion of the wellbore.

9. A method as claimed in Claim 8 wherein the at least one radially extendible gripping member engages with and grips the interior wall of the tubular patch at the

upper end thereof.

10. A method as claimed in Claims 8 or 9 wherein a portion of the patch is plastically expanded by rotating the expander tool and actuating the mechanical means for radially extending the expander elements of the expander tool so that the expander elements engage with the interior wall of the patch and the patch is plastically expanded to form a fluid tight annular (or ring) seal with the wall of the tubular or with the open hole.

11. A method as claimed in Claim 10 wherein the expander tool comprises a further mechanical means for moving the expander elements in a longitudinal direction within the patch and the further mechanical means is electrically actuated to move the expander elements of the expander tool longitudinally through the patch thereby extending the annular seal or plastically expanding the entire tubular patch.

12. A method as claimed in Claim 10 or 11 wherein, after forming the annular seal, the radially extendible expander elements of the expander tool and the radially extendible gripping member(s) of the gripping assembly are retracted and the apparatus is moved to a new position in the patch to form a further annular seal.

13. A method as claimed in Claim 12 wherein at least one annular seal is formed above the hole in the tubular or above the open hole interval of the wellbore and at least one annular seal is formed below the hole in the tubular or below the open hole interval of wellbore.

14. A method as claimed in any one of Claims 8 to 13 wherein the patch is deployed in the wellbore at a location below a restriction, D_1 , and the patch comprises a metal tube that has been deformed into an irregularly shaped tube having a maximum external cross-sectional dimension, D_2 , that is less than D_1 and wherein after the patch has passed through the restriction to the desired location in the wellbore, the expander tool is actuated to reform the patch into a substantially regular shaped tube having an external diameter, D_3 , that is greater than D_1 , and to plastically expand at least a portion of the reformed tube to an external diameter, D_4 , to form a fluid tight annular seal with the wall of the tubular or the wall of the open hole wellbore wherein the expansion ratio, $[(D_4 - D_3)/D_3] \times 100$, of the reformed tube is in the range 10 to 30%.

15. A method as claimed in Claim 14 wherein the tubular patch system is passed to the selected location in the wellbore through the production tubing.

16. A method as claimed in Claims 14 or 15 wherein the deformed patch is a longitudinally corrugated tube.
17. A method as claimed in any one of Claims 8 to 16 wherein the tubular metal patch is provided with an outer resilient sealing member to provide an improved seal with the tubular or with the wall of the open hole wellbore.
18. A method as claimed in any one of claims 8 to 17 wherein the patch is formed from a plurality of tubular metal sections wherein the sections of the patch are joined together using deformable and optionally plastically expandable joints.
19. A method as claimed in any one of Claims 8 to 18 wherein at least one section of the patch is of increased wall thickness, t_1 , compared with the wall thickness, t_2 , of adjacent sections of the patch (i.e. $t_1 > t_2$) and wherein the rotatable expander tool is actuated to plastically expand the at least one section of metal tube of increased wall thickness to form an annular seal with the tubular or open hole wellbore.
20. A method as claimed in Claim 19 wherein the section(s) of metal tube of increased wall thickness, t_1 , is provided with an annular recess or groove on the outer surface thereof having an annular resilient sealing ring located therein and wherein the mechanical means for radially extending the expander elements is actuated to plastically expand the at least one section of metal tube of increased wall thickness, t_1 , thereby forcing the annular resilient sealing ring against the tubular or against the wall of the open hole wellbore to form a fluid-tight annular seal.
21. A method for sealing a hole in a tubular in a wellbore or for sealing an open hole interval of a wellbore comprising:
 - (A) introducing a tubular patch into the wellbore and locating the tubular patch adjacent the hole in the tubular or adjacent the open hole interval of the wellbore;
 - (B) (i) plastically expanding a first portion of the tubular patch above the hole in the tubular or above the open hole interval of the wellbore into annular sealing engagement with the tubular or the open hole to form a first annular seal and (ii) plastically expanding a second portion of the tubular patch below the hole in the tubular or below the open hole interval of the wellbore into annular sealing engagement with the tubular or the open hole to form a second annular seal thereby sealing the hole in the tubular or the open hole interval of the wellbore.
22. A method as claimed in Claim 21 wherein further portions of the tubular patch

are plastically expanded into annular sealing engagement with the tubular or the open hole to form further annular seals.

23. A method as claimed in Claims 21 or 22 wherein the tubular patch is a tubular section of a sandscreen that comprises at least one tubular section and at least one screen section.

24. A method as claimed in Claims 21 or 22 wherein the tubular patch is deployed in the wellbore at a location below a restriction, D_1 , and the patch comprises a metal tube that has been deformed into an irregularly shaped tube having a maximum external cross-sectional dimension, D_2 , that is less than D_1 and wherein after the patch has passed through the restriction to the desired location in the wellbore, the patch is reformed into a substantially regular shaped tube having an external diameter, D_3 , that is greater than D_1 , and the first and second annular seals are formed by plastically expanding the first and second portions of the reformed tube to an external diameter, D_4 , wherein the expansion ratio, $[(D_4 - D_3)/D_3] \times 100$, of the first and second portions of the reformed tube is in the range 10 to 30%.

25. A method as claimed in any one of the preceding claims wherein the first, second and optional further portion(s) of the patch that are plastically expanded to form the annular seals with the tubular or open hole are of increased wall thickness, t_1 , compared with the wall thickness, t_2 , of adjacent portions of the patch.

26. A method as claimed in any one of Claims 21 to 25 wherein the ring seals are formed using the apparatus of any one of Claims 1 to 7.

27. A patch for deployment in a wellbore at a location below a restriction, D_1 , the patch comprising a deformed irregularly shaped metal tube having a maximum external diameter, D_2 , wherein the patch is capable of being reformed into a substantially regular shaped tube having an external diameter, D_3 , where D_2 is less than D_1 and D_3 is greater than D_1 , and wherein at least a section of the reformed tube is capable of being plastically expanded to an external diameter, D_4 , wherein the expansion ratio, $[D_4 - D_3]/D_3 \times 100$, of the reformed tube is in the range 10 to 30%.

28. A plastically expandable tubular metal patch wherein at least one section of the metal tube is of a reduced inner diameter and hence increased wall thickness, t_1 , compared with the wall thickness, t_2 , of adjacent sections of the metal tube and the difference in thickness, $t_1 - t_2$, corresponds to the radial distance over which the section of

the metal tube of increased wall thickness, t_1 , is to be plastically expanded.

29. A plastically expandable tubular metal patch as claimed in Claim 28 wherein the section(s) of metal tube of increased wall thickness, t_1 , is provided with an annular recess or groove on the outer surface thereof having an annular resilient sealing ring located therein.

30. A method of hanging a liner string from a cased or lined interval of a wellbore comprising:

(A) introducing into the wellbore a liner system comprising a liner string and an apparatus for forming an annular seal between the liner string and the cased or lined interval of the wellbore wherein the apparatus comprises (a) a gripping assembly comprising at least one radially extendible gripping member for gripping the interior wall of the liner string as the liner string is being introduced into the wellbore and a mechanical means for radially extending the gripping member(s); (b) a rotatable expander tool, disposed in an upper portion of the liner string, comprising a plurality of expander elements radially extendible therefrom adapted to engage with the interior wall of the liner string and a mechanical means for radially extending the expander elements; and (c) at least one electric motor for supplying motive power to the mechanical means for radially extending the gripping member(s) of the gripping assembly, for supplying motive power to the mechanical means for radially extending the expander elements of the expander tool, and for providing rotation to the expander tool;

(B) locating the liner system in the wellbore such that an upper section of the liner string overlaps with a lower section of the cased or lined interval of the wellbore; and

(C) actuating the expander tool so that the expander elements plastically expand a portion of the upper section of the liner string to form an annular seal between the upper section of the liner string and the lower section of the cased or lined interval of the wellbore and optionally, actuating the expander tool to form further annular seals between the upper section of the liner string and the lower section of the cased or lined interval of the wellbore.

1/6

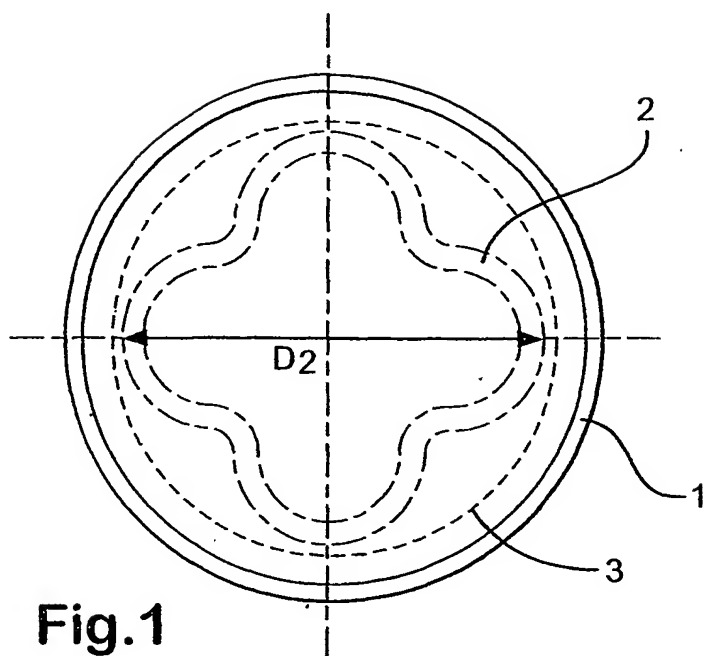


Fig.1

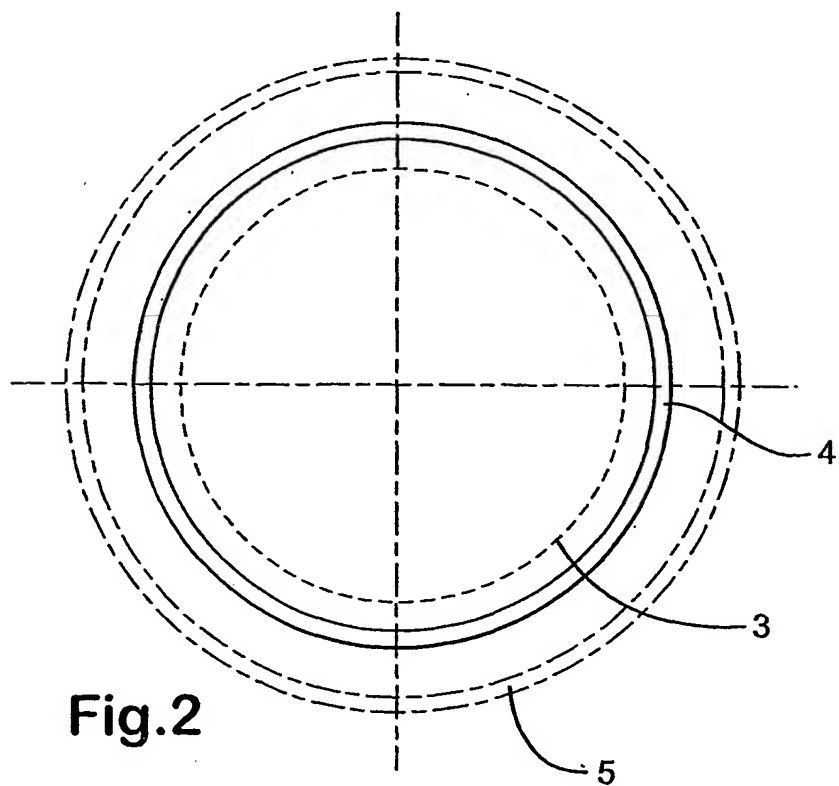


Fig.2

2/6

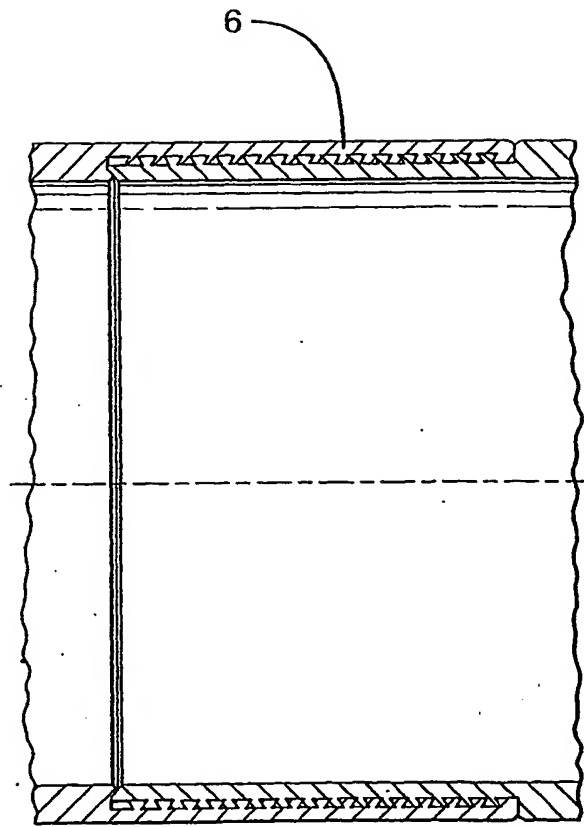


Fig.3

3/6

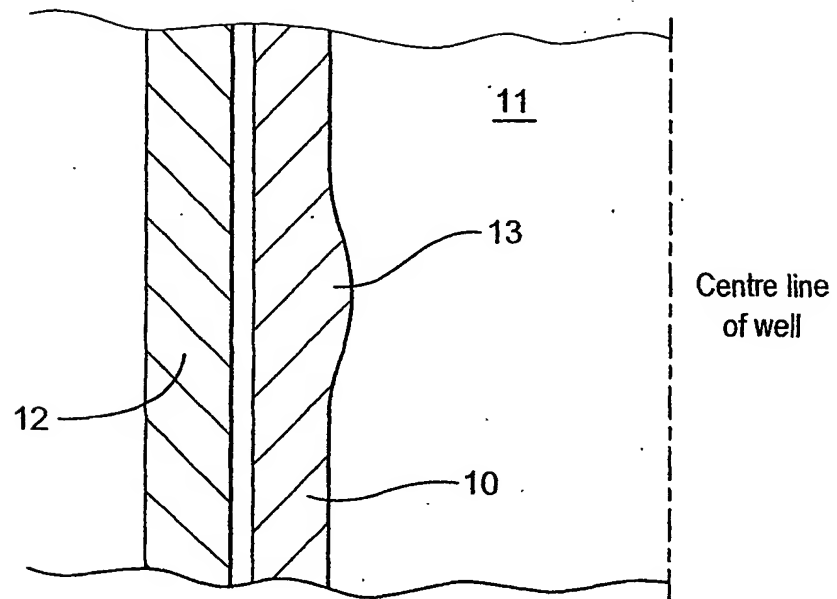


Fig.4

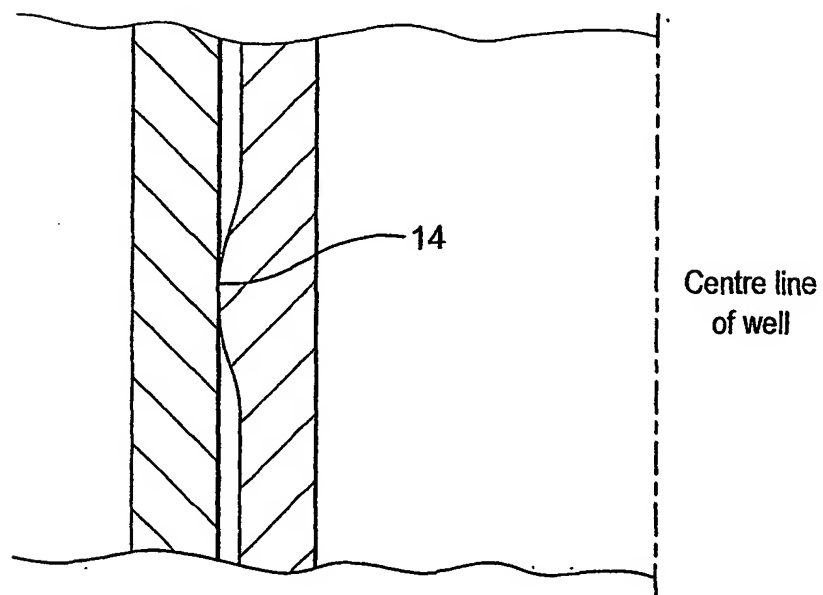


Fig.5

4/6

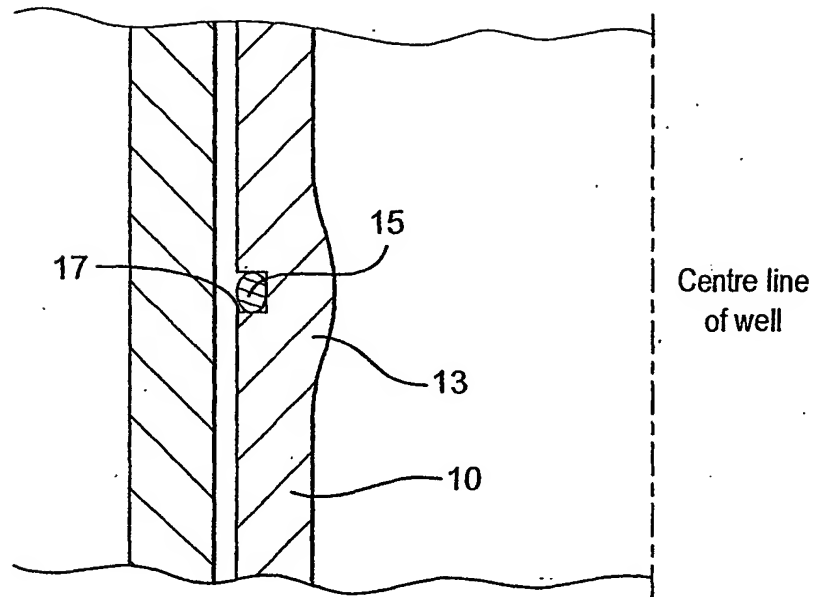


Fig.6

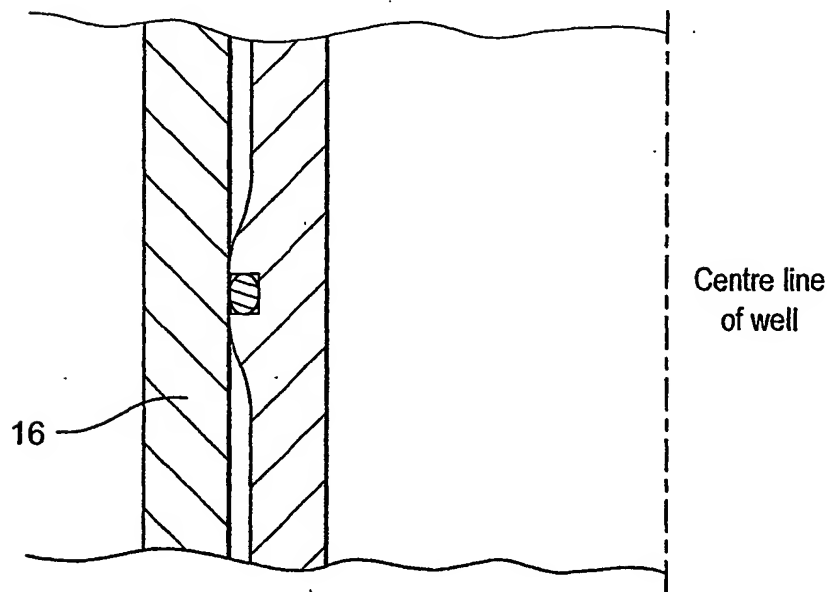


Fig.7

Fig.8


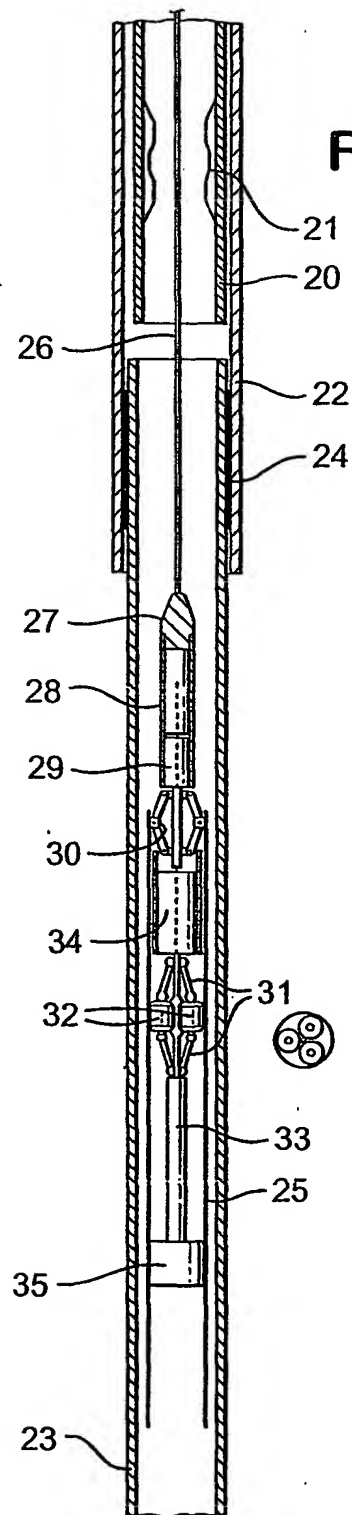


Fig.9

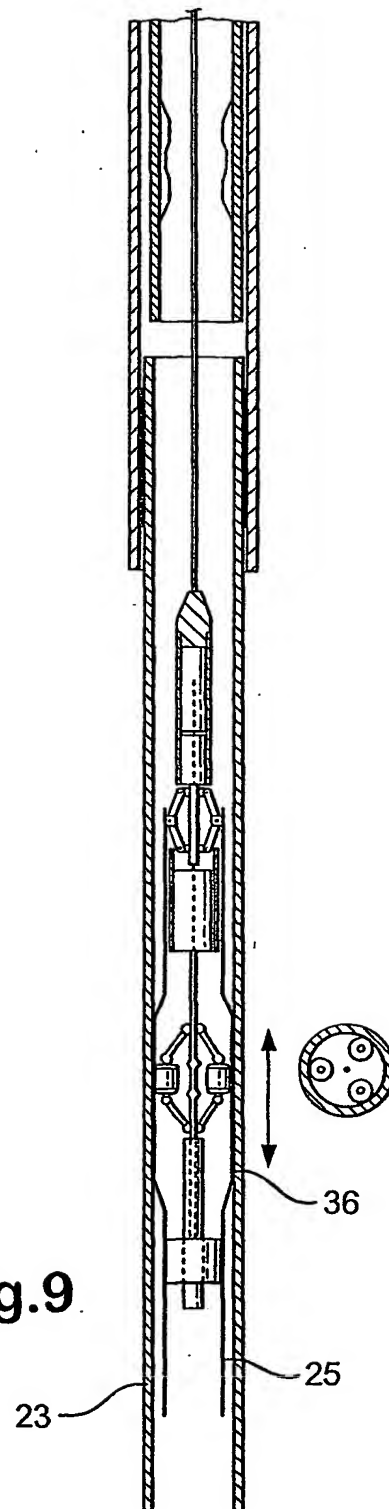

6/6

Fig.10


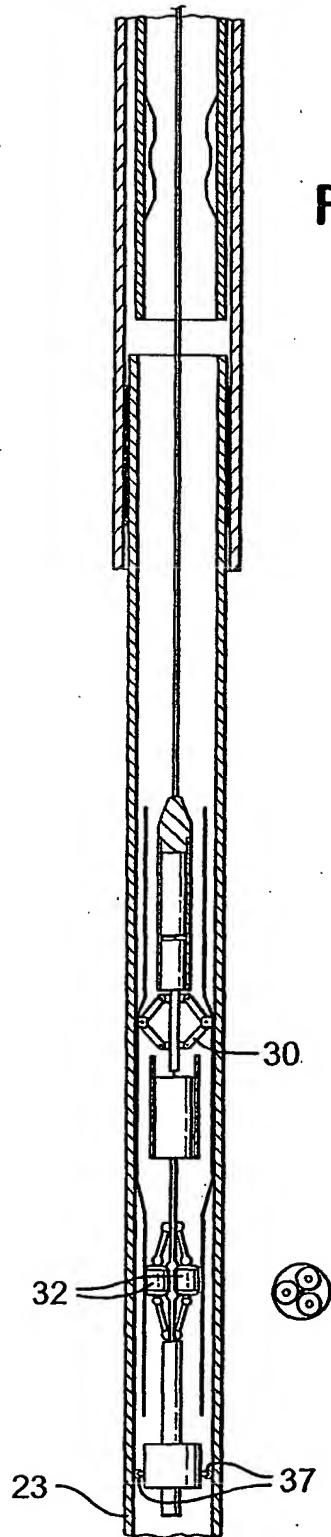


Fig.11

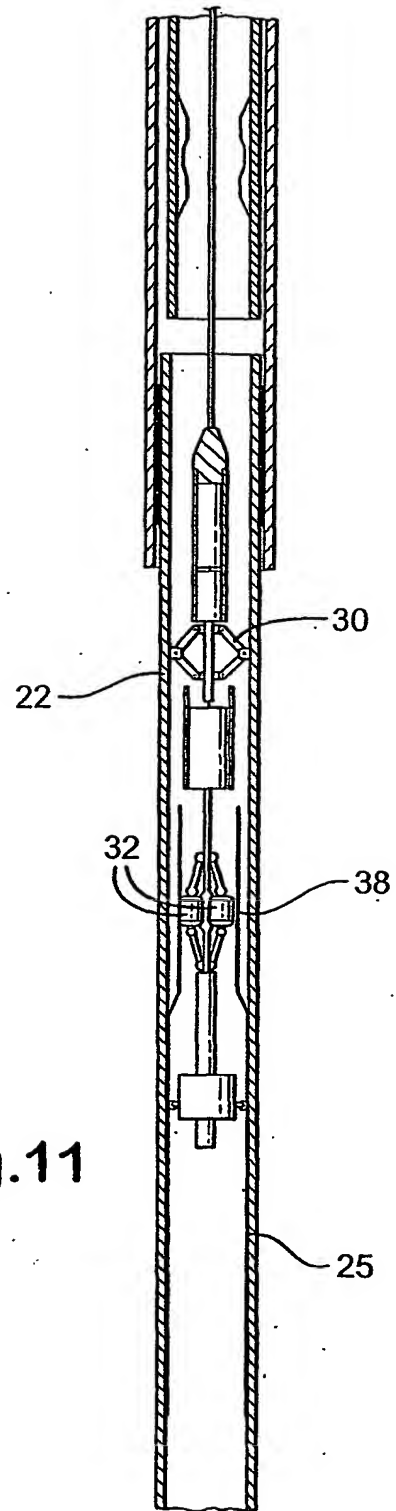

INTERNATIONAL SEARCH REPORT

International Application No
GB2004/002763

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 E21B43/10 E21B29/10 E21B41/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/185274 A1 (SIMPSON NEIL A A ET AL) 12 December 2002 (2002-12-12)	1-6, 8-13,17, 18, 21-23, 26,30
Y	paragraphs '0006!, '0007!, '0009! - '0012!, '0025! - '0028!, '0030! - '0034!; claim 7 figures 1-9	14-16, 19,20, 24,25
A	US 4 624 306 A (PALMER C DALE ET AL) 25 November 1986 (1986-11-25) abstract	7

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

16 November 2004

Date of mailing of the international search report

23.11.2004

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentlaan 2
NL - 2280 HV Rijswijk
Tel (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

van Berlo, A

INTERNATIONAL SEARCH REPORT

onal Application No

GB2004/002763

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/050360 A1 (STEWART R BRUCE ET AL) 2 May 2002 (2002-05-02)	28,29
Y	figures 3,6,9c,10c-10f	19,20,25
A	US 2002/092648 A1 (HACKWORTH MATTHEW R ET AL) 18 July 2002 (2002-07-18) abstract	23
X	WO 01/04535 A (STEWART R BRUCE ; COOK ROBERT LANCE (US); ENVENTURE GLOBAL TECHNOLOGY) 18 January 2001 (2001-01-18)	28
A	figures 10d-10g	19,20,25
Y	WO 01/33037 A (STEWART R BRUCE ; COOK ROBERT LANCE (US); COWAN KENNETH MICHAEL (US);) 10 May 2001 (2001-05-10) figures 3,4	19,20,25
X	WO 00/77431 A (FRIEDMAN MARK M ; STEWART R BRUCE (NL); SHELL INT RESEARCH (NL); BRISC) 21 December 2000 (2000-12-21) figures 9c,10,11,14,27-30	28
P,A	US 2003/188868 A1 (TRAHAN KEVIN O ET AL) 9 October 2003 (2003-10-09) figures 16,17	28
X	WO 99/13195 A (NOBILEAU PHILIPPE) 18 March 1999 (1999-03-18) page 4, lines 33-38; figures 1-19	27
Y	page 7, lines 28-35; figure 20	14-16,24
X	WO 01/18353 A (E2 TECH LTD ; INNES GARETH (GB); OOSTERLING PETER (NL)) 15 March 2001 (2001-03-15) page 16, lines 7-20; figures 1-3	27
A	page 17, line 23 - page 18, line 2 page 18, line 30 - page 19, line 3 page 21, line 28 - page 22, line 1	14-16,24
X	US 6 142 230 A (WRIGHT RALPH DAVID ET AL) 7 November 2000 (2000-11-07) column 1, lines 17-25; figures 4,5,7,10 column 17, line 66 - column 18, line 34 column 22, line 13 - column 23, line 18	27
X	WO 02/35058 A (METCALFE PAUL DAVID ; HARRALL SIMON JOHN (GB); TILTON FREDERICK T (US)) 2 May 2002 (2002-05-02)	27
A	page 6, column 24 - page 11, column 18; figures 1-5	14-16,24
	-/--	

INTERNATIONAL SEARCH REPORT

International Application No.

GB2004/002763

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2002/144822 A1 (HACKWORTH MATTHEW R ET AL) 10 October 2002 (2002-10-10)	27
A	paragraphs '0043!', '0058!', '0059!', '0062!; figures 4,11-13	14-16,24
A	US 3 203 451 A (VINCENT RENIC P) 31 August 1965 (1965-08-31) cited in the application column 10, lines 15-20; figures 1,2,7	14-16,27
P,A	GB 2 388 858 A (SCHLUMBERGER HOLDINGS) 26 November 2003 (2003-11-26) the whole document	27

INTERNATIONAL SEARCH REPORT

national application No.
PCT/GB2004/002763

Box II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:
2. ☐ Claims Nos.:
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

see additional sheet

1. ☒ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.
2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:
4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☒ No protest accompanied the payment of additional search fees.

This International Searching Authority found multiple (groups of) inventions in this international application, as follows:

1. claims: 1-13,17,18,21-23,26,30

Expanding a tubular patch
—

2. claims: 14-16,24,27

Deformed patch
—

3. claims: 19,20,25,28,29

Patch with section of increased wall thickness
—

INTERNATIONAL SEARCH REPORT

onal Application No

3B2004/002763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002185274 A1	12-12-2002	US 2001045284 A1	29-11-2001
		US 6325148 B1	04-12-2001
		US 2001040054 A1	15-11-2001
		US 2004173355 A1	09-09-2004
		US 2002079100 A1	27-06-2002
		AU 772790 B2	06-05-2004
		AU 1044201 A	03-07-2001
		CA 2393744 A1	28-06-2001
		EP 1242714 A1	25-09-2002
		WO 0146551 A1	28-06-2001
		NO 20022786 A	14-08-2002
		US 2003106698 A1	12-06-2003
		US 2003188868 A1	09-10-2003
		US 6598678 B1	29-07-2003
		US 2002166664 A1	14-11-2002
		US 2003019638 A1	30-01-2003
		US 2003062171 A1	03-04-2003
		AU 5493101 A	20-11-2001
		CA 2406663 A1	15-11-2001
		EP 1278932 A1	29-01-2003
		WO 0186111 A1	15-11-2001
		NO 20024946 A	23-12-2002
		US 2004159466 A1	19-08-2004
US 4624306 A	25-11-1986	US 4509593 A	09-04-1985
US 2002050360 A1	02-05-2002	US 6640903 B1	04-11-2003
		US 6497289 B1	24-12-2002
		US 2003192705 A1	16-10-2003
		US 2002060068 A1	23-05-2002
		US 2002060078 A1	23-05-2002
		US 2002040787 A1	11-04-2002
		US 2002060069 A1	23-05-2002
		US 2003098154 A1	29-05-2003
		US 2003094278 A1	22-05-2003
		US 2003094279 A1	22-05-2003
		US 2003121558 A1	03-07-2003
		US 2003173090 A1	18-09-2003
		US 6604763 B1	12-08-2003
		US 6557640 B1	06-05-2003
		US 2004188099 A1	30-09-2004
		US 2004182569 A1	23-09-2004
		US 2004123988 A1	01-07-2004
		US 2002189816 A1	19-12-2002
		US 2003056949 A1	27-03-2003
		US 2004045616 A1	11-03-2004
		US 2004118574 A1	24-06-2004
		US 6575240 B1	10-06-2003
		US 2001047870 A1	06-12-2001
		US 2001047866 A1	06-12-2001
		US 2001045289 A1	29-11-2001
		CA 2300363 A1	11-09-2000
		GB 2348223 A ,B	27-09-2000
		GB 2385619 A ,B	27-08-2003
		GB 2385620 A ,B	27-08-2003
		GB 2385621 A ,B	27-08-2003
		GB 2385622 A ,B	27-08-2003
		GB 2385623 A ,B	27-08-2003

INTERNATIONAL SEARCH REPORT

International Application No

GB2004/002763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002050360 A1		NO 20001281 A	12-09-2000
		AU 770008 B2	12-02-2004
		AU 1641700 A	31-08-2000
		BR 0000923 A	26-09-2000
		CA 2299076 A1	25-08-2000
		DE 10007547 A1	28-09-2000
		GB 2348657 A ,B	11-10-2000
		GB 2384800 A ,B	06-08-2003
		GB 2384801 A ,B	06-08-2003
		GB 2384802 A ,B	06-08-2003
		GB 2384803 A ,B	06-08-2003
		GB 2384804 A ,B	06-08-2003
		GB 2384805 A ,B	06-08-2003
		GB 2384806 A ,B	06-08-2003
		GB 2384807 A ,B	06-08-2003
		GB 2384808 A ,B	06-08-2003
		NO 20000924 A	28-08-2000
		AU 771884 B2	08-04-2004
US 2002092648 A1	18-07-2002	GB 2371063 A ,B	17-07-2002
		NO 20020223 A	17-07-2002
		US 2002092649 A1	18-07-2002
		US 2002125008 A1	12-09-2002
		US 2002125009 A1	12-09-2002
		US 2003221829 A1	04-12-2003
		US 2004163819 A1	26-08-2004
		US 2004173350 A1	09-09-2004
		BR 0200866 A	24-09-2002
		CA 2367859 A1	16-07-2002
WO 0104535 A	18-01-2001	AU 776580 B2	16-09-2004
		AU 5921400 A	30-01-2001
		CA 2383231 A1	18-01-2001
		GB 2368865 A ,B	15-05-2002
		GB 2392932 A ,B	17-03-2004
		GB 2392686 A ,B	10-03-2004
		GB 2392691 A ,B	10-03-2004
		NO 20020070 A	08-03-2002
		WO 0104535 A1	18-01-2001
		US 2002060068 A1	23-05-2002
WO 0133037 A	10-05-2001	AU 1356601 A	14-05-2001
		CA 2389094 A1	10-05-2001
		GB 2374622 A ,B	23-10-2002
		GB 2390387 A ,B	07-01-2004
		GB 2390628 A ,B	14-01-2004
		NO 20022048 A	28-06-2002
WO 0077431 A	21-12-2000	WO 0133037 A1	10-05-2001
		AU 4141300 A	02-01-2001
		CA 2306656 A1	26-10-2000
		GB 2361724 A	31-10-2001
		GB 2355738 A ,B	02-05-2001
		GB 2388391 A ,B	12-11-2003
		GB 2388392 A ,B	12-11-2003
		GB 2388393 A ,B	12-11-2003
		GB 2388394 A ,B	12-11-2003
		GB 2388395 A ,B	12-11-2003

INTERNATIONAL SEARCH REPORT

International Application No

'GB2004/002763

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0077431 A		WO 0077431 A2	21-12-2000
		US 2003098154 A1	29-05-2003
		US 2003098162 A1	29-05-2003
		US 2003094278 A1	22-05-2003
		US 2003024708 A1	06-02-2003
		US 2003094277 A1	22-05-2003
		US 2003094279 A1	22-05-2003
		US 2003121558 A1	03-07-2003
		US 2003173090 A1	18-09-2003
		US 2003222455 A1	04-12-2003
		US 6604763 B1	12-08-2003
		US 6557640 B1	06-05-2003
		US 2002060068 A1	23-05-2002
US 2003188868 A1	09-10-2003	US 6598678 B1	29-07-2003
		US 6325148 B1	04-12-2001
		AU 1413702 A	21-05-2002
		CA 2428479 A1	16-05-2002
		EP 1333963 A2	13-08-2003
		WO 0238343 A2	16-05-2002
		NO 20032103 A	14-07-2003
		US 2003106698 A1	12-06-2003
		AU 772790 B2	06-05-2004
		AU 1044201 A	03-07-2001
		CA 2393744 A1	28-06-2001
		EP 1242714 A1	25-09-2002
		WO 0146551 A1	28-06-2001
		NO 20022786 A	14-08-2002
		US 2002185274 A1	12-12-2002
		US 2004173355 A1	09-09-2004
		US 2001045284 A1	29-11-2001
WO 9913195 A	18-03-1999	US 5979560 A	09-11-1999
		AU 733469 B2	17-05-2001
		AU 8880598 A	29-03-1999
		CA 2304687 A1	18-03-1999
		EP 1012441 A1	28-06-2000
		WO 9913195 A1	18-03-1999
		NO 20001148 A	07-03-2000
		US 6253852 B1	03-07-2001
		US 2004168809 A1	02-09-2004
WO 0118353 A	15-03-2001	AU 775105 B2	15-07-2004
		AU 7020700 A	10-04-2001
		CA 2383150 A1	15-03-2001
		EA 3386 B1	24-04-2003
		EP 1210501 A1	05-06-2002
		WO 0118353 A1	15-03-2001
		JP 2003508660 T	04-03-2003
		NO 20021080 A	19-03-2002
		NZ 517490 A	27-02-2004
		US 6745846 B1	08-06-2004
US 6142230 A	07-11-2000	US 5957195 A	28-09-1999
		US 5785120 A	28-07-1998
		AU 1054400 A	22-05-2000
		CA 2347895 A1	11-05-2000
		EP 1127210 A1	29-08-2001

INTERNATIONAL SEARCH REPORT

International Application No

GB2004/002763

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 6142230	A		WO 0026502 A1	11-05-2000
			NO 20011854 A	12-06-2001
			AU 732007 B2	12-04-2001
			AU 4955097 A	03-06-1998
			CA 2270986 A1	22-05-1998
			EP 0948703 A2	13-10-1999
			WO 9821444 A2	22-05-1998
			NO 991666 A	23-06-1999
			NO 20021323 A	23-06-1999
WO 0235058	A	02-05-2002	AU 1072102 A	06-05-2002
			CA 2417487 A1	02-05-2002
			EP 1328705 A1	23-07-2003
			WO 0235058 A1	02-05-2002
			US 2002108756 A1	15-08-2002
			US 2004159446 A1	19-08-2004
			US 2004173360 A1	09-09-2004
US 2002144822	A1	10-10-2002	GB 2371574 A ,B	31-07-2002
			GB 2388858 A ,B	26-11-2003
			GB 2388859 A ,B	26-11-2003
			NO 20020351 A	25-07-2002
			US 2004084176 A1	06-05-2004
			US 2004089454 A1	13-05-2004
			BR 0200733 A	12-11-2002
			CA 2367650 A1	24-07-2002
US 3203451	A	31-08-1965	US 3179168 A	20-04-1965
			US 3203483 A	31-08-1965
GB 2388858	A	26-11-2003	US 2002144822 A1	10-10-2002
			GB 2388859 A ,B	26-11-2003
			BR 0200733 A	12-11-2002
			CA 2367650 A1	24-07-2002
			GB 2371574 A ,B	31-07-2002
			NO 20020351 A	25-07-2002
			US 2004084176 A1	06-05-2004
			US 2004089454 A1	13-05-2004



INVESTOR IN PEOPLE

Application No: GB0506187.4

Examiner: David Pepper

Claims searched: 1-11

Date of search: 4 May 2005

Patents Act 1977: Search Report under Section 17

Documents considered to be relevant:

Category	Relevant to claims	Identity of document and passage or figure of particular relevance
X,P	1-11	GB 2401131 A (Weatherford/Lamb) - whole document
A	-	US 6708767 B2 (Harrall et al)
A,P	-	WO 2005/003511 A1 (BP Exploration Operating Co)
&	-	US 2005/0045342 A1 (Luke et al)

Categories:

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.

Field of Search:

Search of GB, EP, WO & US patent documents classified in the following areas of the UKC^X:

E1F

Worldwide search of patent documents classified in the following areas of the IPC⁰⁷

E21B

The following online and other databases have been used in the preparation of this search report

WPI, EPODOC

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.